

MCL-191

19" CCTV TFT LCD MONITOR

- FEATURES -

- Metal case
- Two looping composite input & output
- One looping S-Video input & output
- Two audio input (PC audio), RCA audio
- VGA input
- 3-D Digital comb filter & De-interlace for high quality video
- De-interlace function
- DC 12V adapter
- Internal speakers



- FRONT -




- SIDE -



- REAR -

- INPUT / OUTPUT TERMINALS -

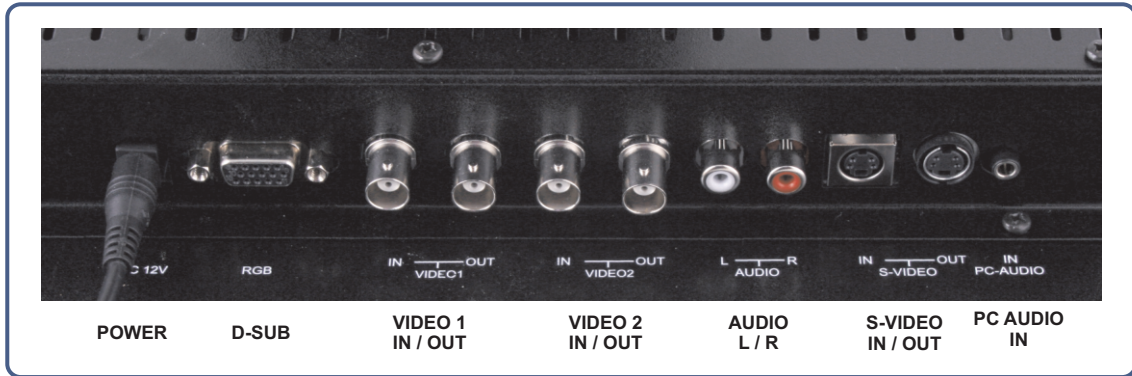

- SPECIFICATIONS -

MCL-191			
VIDEO	Type	19" TFT LCD Panel	
	Driver Element	Inches a-Si TFT Active matrix	
	Pixel Pitch	0.264mm x 0.264mm	
	Pixel Arrangement	1280(H) x 1024(V) @ 60Hz (SXGA)	
	Display Colors	16.2M colors	
	Viewing Area	376 x 301mm	
	Contrast Ratio	1000 : 1	
	Luminance of White	300 cd/m ²	
	Viewing Angles (CR≥10)	Left / Right	80° / 80°
		Top / Bottom	80° / 80°
	Life Time	50,000 Hours	
	Response Time (Tr / Td)	< 5ms	
	Frequency	Horizontal	31 ~ 64KHz
		Vertical	55 ~ 75KHz
	Video Mode	NTSC / PAL (Auto selection)	
Video Input	BNC x 2 (1.0Vp-p, 75Ω), D-SUB (VGA), S-Video (4 Pin mini din)		
Video Output	BNC x 2 (1.0Vp-p, 75Ω), S-Video (4 Pin mini din)		
PC	Input Signal	D-SUB (15 Pin)	
	Input Resolution	1280x1024 @ 60Hz	
AUDIO	Audio Input Connector	PC-RCA input (Stereo)	
	Audio Output	Built-in speaker (2W x 2)	
CONTROL	User Controls	PC	Size, Phase, Auto control, Color control etc.
		Video	Picture, Setup
	OSD Language	English / German / Spanish / Italian / French	
POWER	DC Power	DC 12V (±5%)	
	Power Consumption (Without Audio)	45W	
	Power Supply	External AC adapter (DC +12V)	
MECH.	Dimensions (W) x (H) x (D)	418.4 x 388.5 x 182 (mm)	
	Case Color	Black	
	Case Material	Metal	
	Weight (Net)	7.0kg (8.0kg)	
TEMP.	Operating Temperature	0 ~ 40°C	
	Storage Temperature	0 ~ 50°C	
ACCESSORIES		AC adaptor, Power cord, Manual, D-SUB cable, Protection glass (Option)	

* Specifications are subject to change without notice.