

MDW-S264S


NETWORK CENTRAL MONITORING SYSTEM




- FEATURES -

- D1 / Megapixel Camera
- 64 Channels Display
- PTZ Setting (Preset)
- Intelligent : Overview, Motion Detection
- Event Handling :
Mail Server, FTP Server, HTTP Server, TCP Server,
Warning Sound, Emergency, Finishing Configuring Action Group,
Event Trigger Schedule
- E-Map : E-Map Overview, Location Setting, Detail Setting
- User Account
- Recording
- Backup : Backup Media Database, AVI Export, Configuration Backup
- Log View
- Live View :
Overview, Adjust Viewing Layout, Full Screen, Video Bar Quick Access, PTZ & Preset Control, Sequence Viewing
- E-Map Monitor
- Event Monitor
- Playback

- CONFIGURATION -

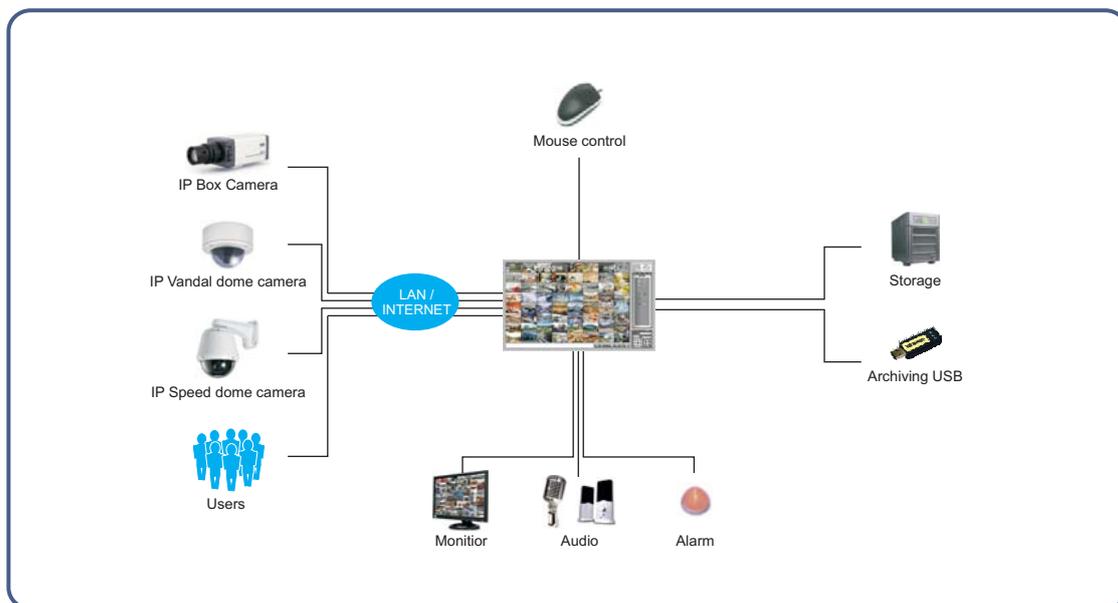

- MAIN PROGRAM -

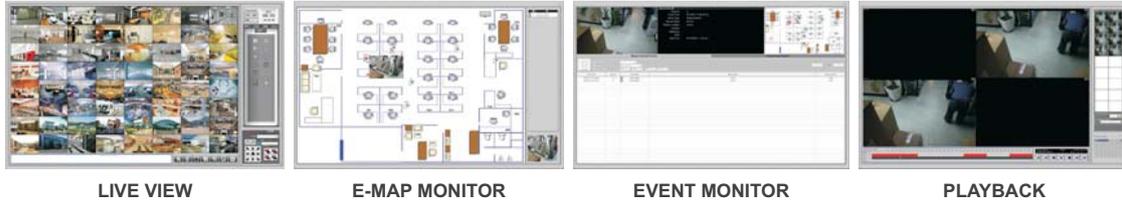


LIVE VIEW

E-MAP MONITOR

EVENT MONITOR

PLAYBACK

- FULL HD HIGH-RESOLUTION RECORDING -

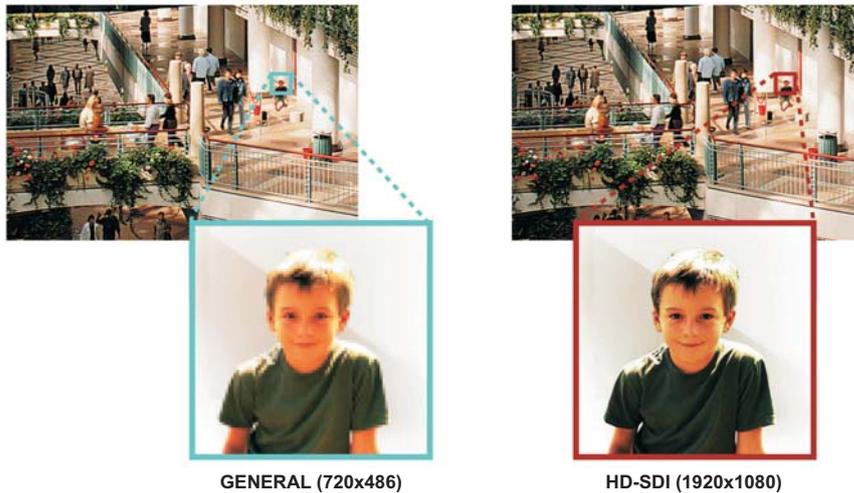

GENERAL (720x486)

HD-SDI (1920x1080)

- CMS PC SYSTEM -

PC SYSTEM REQUIREMENTS		
HARDWARE	CPU	Intel Core2 Duo or above
	RAM	Minimum 1GB, 2GB or above is recommended
	HDD	SATA 200GB or above is recommended
	Display Card	Independent display card suggested * Make sure your display DPI setting is set to default at 96DPI * To set DPI value, right-click on desktop, choose "Setting" tab > "Advanced" > "General"
	Ethernet Interface	Ethernet interface : 10/100Mbps Ethernet card or above
SOFTWARE	OS	Windows 2000(SP4), Windows XP, Windows 2003, Windows Vista, Windows 7

* The above specifications can be changed without any prior notification.