

## DOME CAMERA

# TDC-2104AD3

540TVL / CMOS COLOR DOME CAMERA



### - FEATURES -

- 1/3" CMOS Image Sensor
- 540TV Lines Horizontal Resolution
- Excellent Low Light Sensitivity of 0.1Lux/F1.2
- Auto White Balance
- Auto Gain Control
- Board Lens f=3.6mm
- Ø80 Dome

**Option :** Wall Mount Bracket



1/3 CMOS  
IMAGE SENSOR




3.6mm  
BOARD LENS



DC 12V

### - DIMENSION -

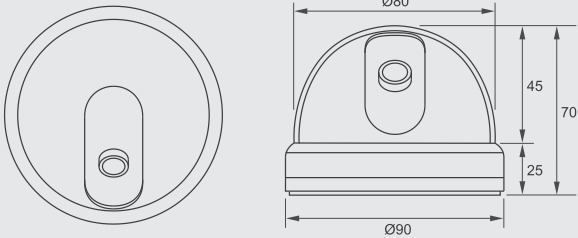

### - WALL MOUNT BRACKET -



MBR-080WM

### - SPECIFICATIONS -

| TDC-2104AD3           |                            |
|-----------------------|----------------------------|
| Signal Format         | NTSC / PAL                 |
| Horizontal Resolution | 540TV Lines                |
| Image Sensor          | 1/3" CMOS Image Sensor     |
| Total Pixels          | 762(H) x 504(V)            |
| Effective Pixels      | 728(H) x 488(V)            |
| Scanning System       | 2:1 Interlace              |
| Synchronization       | Internal                   |
| Scanning Frequency    | 15.734 KHz(H), 59.94 Hz(V) |
| Video Output          | CVBS : 1.0Vp-p/75Ω         |
| Min. Illumination     | 0.1Lux/F1.2                |
| Iris Control          | Auto                       |
| Signal to Noise Ratio | More than 48dB             |
| White Balance         | Auto                       |
| Gain Control          | Auto                       |
| Lens                  | Board Lens f=3.6mm         |
| Input Voltage         | DC 12V (±10%)              |
| Power Consumption     | Max. 0.8W                  |
| Operating Temperature | -10°C ~ +50°C              |
| Operating Humidity    | 30% ~ 90% RH               |
| Dimension             | 90(Ø) x 70(H)mm            |
| Weight                | Approx. 170g               |